



## Stitched Combo Mat E-BXMC2408

### E-BX series (two stages)

E-BXMC2408 is an E-Glass Stitched Combo Mat.

Two layers of roving (450g/m<sup>2</sup>-850g/m<sup>2</sup>) are aligned at +45°/-45° with or without a layer of chopped strands (0g/m<sup>2</sup>-500g/m<sup>2</sup>).

#### SPECIFICATIONS

Type of Glass  
E-Glass (E)

Type of Fiberglass  
E-BX series mat (two stages)

Widths Available:  
Maximum: 100 inches

#### FEATURES:

- Easy handling
- Fast wet-out
- High productivity
- High strength in a specific direction
- Increase of properties of laminated FRP in terms of tensile strength, delaminating resistance under stress and flexural strength
- No binder used
- Reduction of weight of FRP
- Smooth, shiny surface in finished molded parts

#### USES:

- Boats/yachts

#### PACKING:

Rolls are wound on tubes with high tension. The individual rolls can be wrapped in a plastic bag and protected by a cardboard box. The rolls can be in bulk or packed on pallets (no more than 3 rolls per layer). Pallets are protected by a plastic film and reinforced with PET belts.

#### TECHNICAL PARAMETERS

Overall Density:  
1116.53 g/m<sup>2</sup>

Roving Density:  
+45: 414.06 g/m<sup>2</sup>  
-45: 414.06 g/m<sup>2</sup>

Chop Density:  
274.64 g/m<sup>2</sup>

Polyester Yarn Density:  
13.77 g/m<sup>2</sup>

#### NOMENCLATURE

E-BXMC-000-000

Biaxial or double bias


Weight in Mat

Weight in Glass

Chopped Strand Mat

# Stitched Combo Mat E-BXMC2408

## E-BX series (two stages)

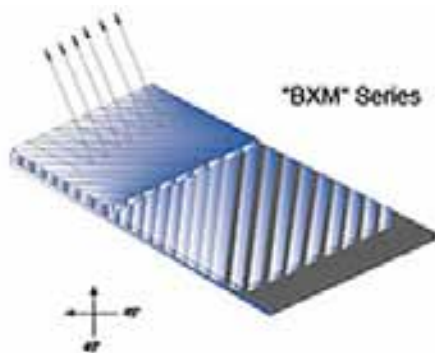

### E-BXMC2408

Fiber Type : E-Glass  
 Architecture: +45° , -45° , mat  
 Dry Thickness: 0.057 in / 1.46mm  
 Total Weight\*\* : 32.93oz/yd<sup>2</sup> / 1116.53g/m<sup>2</sup>

Layer Number	Fiber Orientation	Yield(yds/lb)	Type	Micron Count	Ends per Inch	Oz/yd <sup>2</sup>	g/m <sup>2</sup>
1	+45°	1103tex JUSHI	E-glass fiber	17	9	12.21	414.06
2	-45°	1103tex JUSHI	E-glass fiber	17	9	12.21	414.06
3	mat	2400tex JUSHI	E-glass fiber	13	9	8.1	274.64
4							
5							
Stich Yarn	Tricot 0-1/1-2		100% Polyester	100denier		0.41	13.77
Total						32.93	1116.53

\* Packing: Box or Bag

\*\* Total weight refers to reinforcement materials (does not include stitching )



### STORAGE

Unless otherwise specified, fiberglass products should be stored in a dry, cool and moisture-proof area. Room temperature and humidity should always be maintained at 15°C – 35°C, 35% – 65% respectively.

Best used within 12 months after production date. Fiberglass products should remain in their original packaging until just prior to use.

To ensure safety and avoid damage to the product, the pallets should not be stacked more than two layers high. When the pallets are stacked in two layers, care should be taken to correctly and smoothly move the top pallet.